

# ROUTING SOLUTIONS FOR SERVICE PROVIDERS



## BROCADE MLX SERIES

## Multiservice IP/MPLS Routers

### HIGHLIGHTS

- Scalable multiservice IP/MPLS Carrier Ethernet routers in 4-, 8-, 16-, and 32-slot options
- Fully distributed, non-blocking architecture with up to 15.36 Tbps fabric capacity, providing packet forwarding rates of approximately 5 billion packets per second
- 1536 1 GbE, 256 10 GbE, and 32 100 GbE wire-speed ports in a single router
- Wire-speed IPv4, IPv6, and MPLS forwarding performance with one million FIB entries
- Advanced Layer 2/3 VPN and multicast capabilities to support residential triple-play and business services
- High-availability design with redundant management modules, switch fabrics, power supplies, and fans; hitless failover; hitless software upgrades; and non-stop routing
- Ideal for a wide range of advanced applications in service provider backbones, Metropolitan Area Networks (MANs), Content Service Provider (CSP) networks, data centers, and distributed enterprises

Leading-edge services such as high-definition video streaming, cloud services, and mobile broadband have significantly altered network traffic behavior. Instead of localized flows with occasional bursts, traffic flows are more collaborative over geographical distances and last longer. These new traffic patterns not only consume enormous amounts of network capacity, but also add a greater degree of complexity to network operations. As a result, today's network planners are seeking solutions that provide the right mix of scalability, performance, operational simplicity, and cost-effectiveness.

Built with a state-of-the-art, sixth-generation, network processor-based architecture and terabit-scale switch fabrics, the Brocade® MLX Series provides a rich set of high-performance IPv4, IPv6, and Multiprotocol Label Switching (MPLS) capabilities as well as advanced Layer 2 switching capabilities. As a result, these routers address the diverse needs in environments that include service provider backbones, Metro Ethernet networks, transit/wholesale

networks, Internet Service Providers (ISPs), Content Delivery Networks (CDNs), Internet Exchange Points (IXPs), data centers, and distributed enterprises.

### PROVIDER EDGE AND AGGREGATION

As service providers move rapidly to migrate business and residential services to IP/Ethernet infrastructure, the role of edge and aggregation routers becomes very critical. The routers not only need to deliver the necessary features but must do so in a cost-effective manner. The Brocade MLX Series includes unique capabilities that enable service providers to meet this challenge.

Advanced MPLS capabilities such as Label Distribution Protocol (LDP) and MPLS-TE—along with fast failover mechanisms such as Fast ReRoute (FRR) and Standby LSPs—enable the creation of dynamic label switched paths to support business and triple-play services over a common Ethernet infrastructure.

# BROCADE

## PRIMARY USE CASES

- Large-scale Carrier Ethernet build-outs at the global, national, and metro levels
- High-capacity Internet core routing applications
- Service provider edge and aggregation applications
- MPLS-based Layer 2/3 VPN services
- Content Delivery Networks (CDNs)
- Ethernet and Internet Exchange Points (IXPs)

## Business VPN Services

With the Brocade MLX Series, service providers can offer distributed enterprise connectivity services through a transparent service such as Layer 2 Virtual Private Networks (VPNs) or provide more control through Layer 3 VPN services. The transparent services are delivered as point-to-point or point-to-multipoint services. To facilitate both options, the Brocade MLX Series supports Virtual Private LAN Services (VPLS) and Virtual Leased Line (VLL) implementations using widely accepted LDP signaling.

The routers also support Border Gateway Protocol (BGP)-based MPLS VPNs and provide per-customer routing instances with a choice of BGP, Open Shortest Path

First (OSPF), Routing Information Protocol (RIP), or static routing options. In addition, each virtual forwarding interface supports inbound and outbound Access Control Lists (ACLs) and rate-limiting features for accounting and Service Level Agreement (SLA) enforcement.

## Metro Ethernet Services

With rich MPLS capabilities, the Brocade MLX Series provides an ideal suite of Layer 2 Metro Ethernet technologies for metropolitan service providers. The routers enable advanced Layer 2 Metro Ethernet services based on IEEE 802.1Q, Rapid Spanning Tree Protocol (RSTP), standards-based Metro Ring Protocol (MRP) G.8032, and Virtual Switch Redundancy Protocol (VSRP). The routers provide unique scalability for Layer 2 metro applications with a capacity of up to two million Media Access Control (MAC) addresses per system.

In addition, these Layer 2 and MPLS-based capabilities facilitate the creation of scalable, resilient services that comply with Metro Ethernet Forum (MEF) specifications for Ethernet Private Line (EPL), Ethernet Virtual Private Line (EVPL), and Ethernet LAN (E-LAN). These advanced Carrier Ethernet features, combined with state-of-the-art QoS and wire-speed multicast routing capabilities, make the Brocade MLX Series ideal for aggregating both triple-play and business services (see Figure 1).

## Video Delivery

As more service providers include digital entertainment (using MPEG2/4-quality video) in their offerings, they require enormous amounts of bandwidth per subscriber and efficient multicast delivery. Providing up to 15.36 Tbps of capacity, the Brocade MLX Series is ideally suited for the high-bandwidth, low-latency requirements of video traffic. The routers provide the flexibility of choosing between traditional IP multicast and VPLS to deliver high-quality video.


The routers also provide comprehensive support for multicast routing and switching through a variety of protocols—including PIM-SM, PIM-DM, PIM-SSM, IGMP v2/v3—and other platform-independent capabilities. Egress interface-based replication optimizes performance and buffer usage to help maximize network performance for multicast traffic. In addition, the routers support static IGMP “Joins” and efficient processing of IGMP Join/Leave requests to help ensure a fast channel-zapping experience.

## HIGH-CAPACITY INTERNET BACKBONES

The highly distributed hardware forwarding architecture of the Brocade MLX Series enables service providers to deploy robust, high-bandwidth IPv4 Internet cores.


**Figure 1.**

The Brocade MLX Series is ideal for aggregating both triple-play and business services.

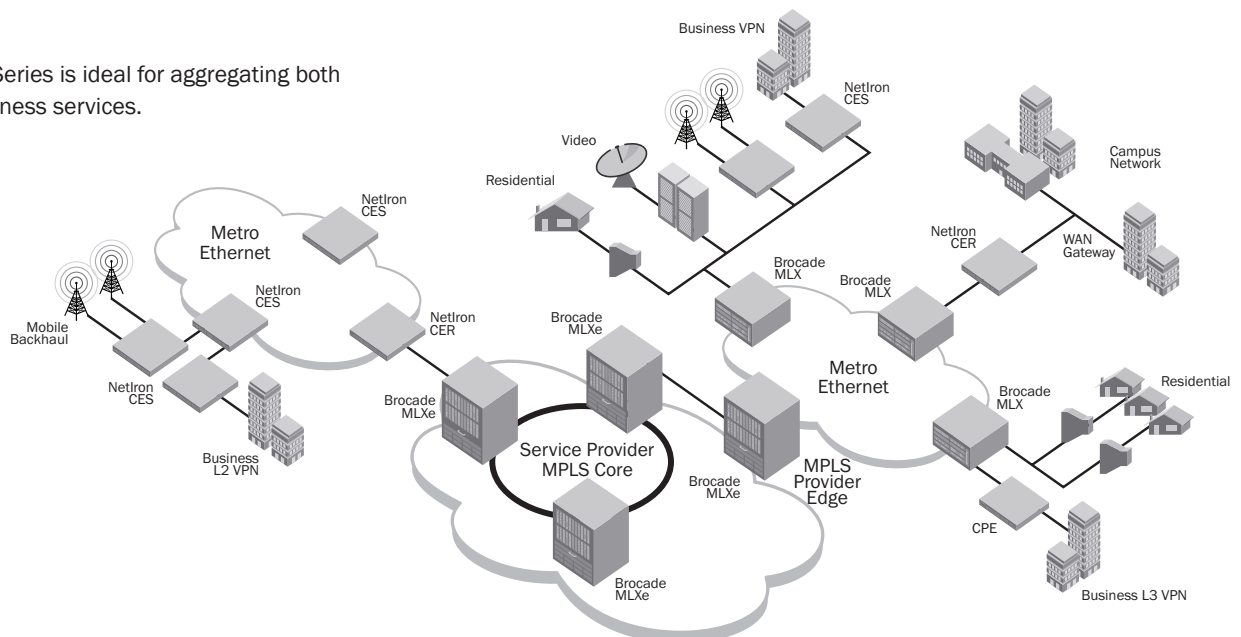

**Figure 2.**

The Brocade MLX Series provides the foundation for Internet backbone architectures with multiple carrier trunks.

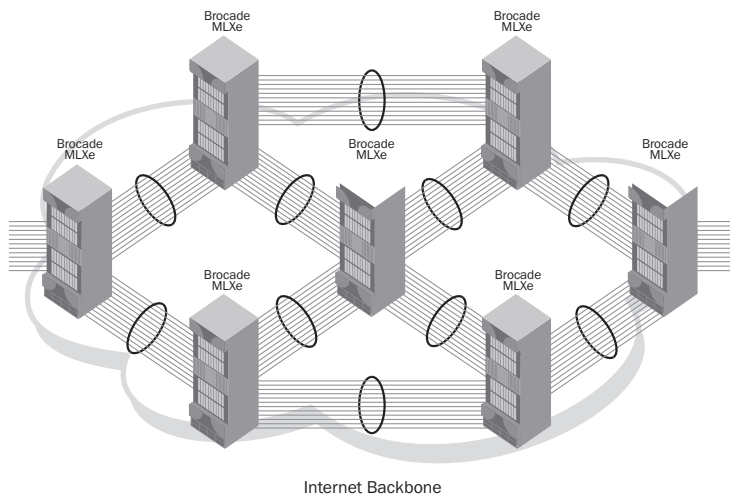

The routers support up to one million IPv4 routes in the hardware Forwarding Information Base (FIB) and up to 10 million BGP routes in the BGP Routing Information Base (RIB). These features, combined with graceful restart mechanisms, enable a highly scalable and reliable Internet core. Robust BGP features, combined with the 2-port 100 Gigabit Ethernet (GbE) module on the Brocade MLX Series, provides a scalable solution for Internet backbones (see Figure 2).

Service providers that want to scale beyond 100 GbE can utilize the industry's only multi-terabit carrier trunks—a single logical connection formed by aggregating multiple 100 GbE ports. These carrier trunks incorporate an innovative load-sharing algorithm that efficiently utilizes all the links in the trunk while eliminating traffic polarization, such as in an Internet backbone.

For deployments that require 10 GbE carrier trunks, the Brocade MLX Series

**EXCEPTIONAL SCALABILITY**


- 10 million BGP routes
- One million IPv4 routes in hardware (FIB)
- 240,000 IPv6 routes in hardware (FIB)
- 2000 BGP peers per system
- 2000 BGP/MPLS VPNs and up to one million VPN routes
- 32,000 VLLs per system
- 16,000 VPLS instances and up to one million VPLS MAC addresses
- 4094 VLANs and up to two million MAC addresses
- 8-path Equal Cost MultiPath (ECMP)

also supports 640 Gbps carrier trunks with up to 64 10 GbE ports in a single Link Aggregation Group (LAG). In addition, the routers' intrinsic wire-speed sFlow capability provides scalable network-wide monitoring to detect malicious traffic and prevent intrusion. This capability also enables proactive management of network bandwidth through traffic trend analysis and capacity upgrade planning.

**SERVICE PROVIDER DATA CENTERS**

To expand their revenue potential, many network service providers now offer cloud-based services. The Brocade MLX Series provides a highly simplified and resilient solution that allows service providers to offer content and bandwidth-intensive services. The high-density 1 GbE and 10 GbE modules, combined with the Multi-Chassis Trunking (MCT) feature, support a highly reliable and efficient data center architecture. MCT enables providers to eliminate STP from the server-to-core layer, thereby maximizing network usage while achieving sub-second resiliency.

The advanced MPLS features at the data center core enable providers to connect geographically distributed data centers using standards-based technology such as VPLS. This approach greatly simplifies operations, because the routers provide a common platform from the service provider network core to the data center core (see Figure 3).

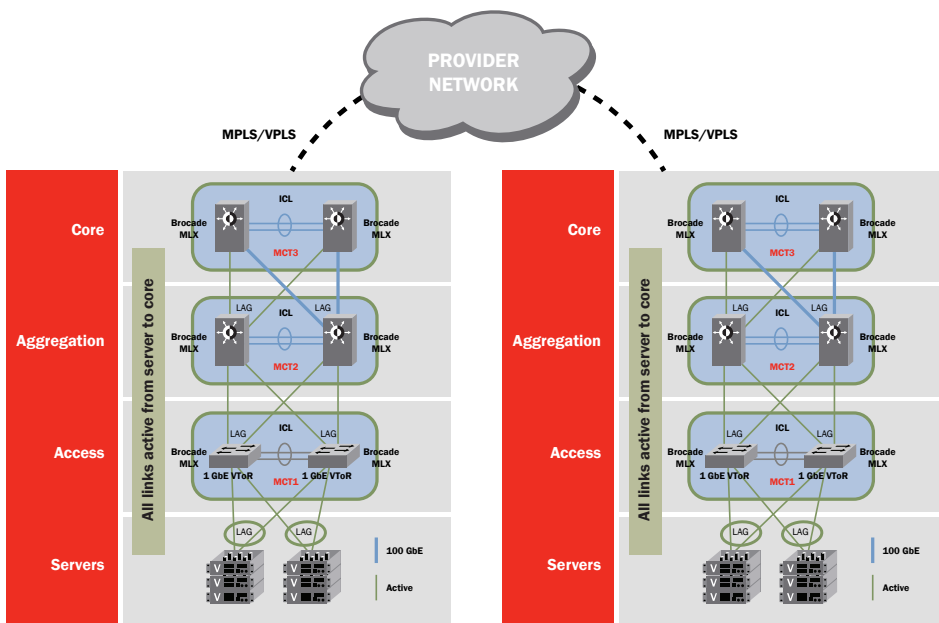

**Figure 3.**

The Brocade MLX Series connects geographically distributed data centers.

## INTERNET EXCHANGE POINTS

Internet Exchanges require high-performance Layer 2 topologies with high-density 10 GbE ports. These crossroads of the Internet connect high-performance routers from many service providers in peering relationships without requiring a full mesh of router connections. With their industry-leading wire-speed 10 GbE port density, the Brocade MLX Series is ideal for these environments. In addition, the routers enable the extension of MPLS into the Internet Exchange core, which provides superior load balancing and better multi-pathing using VPLS, and faster convergence with sub-50 ms failure protection.

## SIMPLIFIED NETWORK MANAGEMENT

Today's exponential growth in video, voice, data, and mobile broadband traffic has significantly increased network complexity for Layer 2 metro networks with MPLS-based infrastructure. Administrators from regional service providers to large Telcos are seeking ways to simplify management, reduce operational costs, prevent bandwidth over-provisioning, and improve user service provisioning.

Brocade Network Advisor provides an easy-to-use solution for discovering, deploying, configuring, and managing Metro and Carrier Ethernet networks. It provides comprehensive management of MPLS services through the MPLS Manager, supporting MPLS-based VPLS, Label Switched Path (LSP), Local VPLS, MPLS VLL, and Local VLL services with an intuitive interface.

## BROCADE GLOBAL SERVICES

To help organizations get the most value from their Brocade MLX Series investments, Brocade Global Services provides a wide range of offerings, including comprehensive hardware and 24x7 software support with software fixes and new releases. Leveraging the Brocade Network Monitoring Service (NMS), organizations can maximize the availability and performance of critical application environments while reducing cost and complexity. They can also utilize Brocade Professional Services to implement and validate the functionality of Brocade solutions. To learn more, visit [www.brocade.com/globalservices](http://www.brocade.com/globalservices).

## ABOUT BROCADE

Brocade networking solutions help the world's leading organizations transition smoothly to a virtualized world where applications and information reside anywhere. These Ethernet, storage, and converged networking offerings are designed for unmatched simplicity, non-stop networking, optimized applications, and investment protection. Learn more at [www.brocade.com](http://www.brocade.com).

### Corporate Headquarters

San Jose, CA USA  
T: +1-408-333-8000  
[info@brocade.com](mailto:info@brocade.com)

### European Headquarters

Geneva, Switzerland  
T: +41-22-799-56-40  
[emea-info@brocade.com](mailto:emea-info@brocade.com)

### Asia Pacific Headquarters

Singapore  
T: +65-6538-4700  
[apac-info@brocade.com](mailto:apac-info@brocade.com)

© 2010 Brocade Communications Systems, Inc. All Rights Reserved. 08/10 GA-SB-1515-00

Brocade, the B-wing symbol, BigIron, DCFM, DCX, Fabric OS, FastIron, IronView, NetIron, SAN Health, ServerIron, Turbolron, and Wingspan are registered trademarks, and Brocade Assurance, Brocade NET Health, Brocade One, Extraordinary Networks, MyBrocade, and VCS are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned are or may be trademarks or service marks of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.



**BROCADE**